

Special for Australian Market



STAVE™ II

320W~340W

5BB-Polycrystalline PV Module

CHSM6612P Series

CHSM6612P/HV Series

CHSM6612P max system voltage 1000V standard

CHSM6612P/HV max system voltage 1500V standard

Tier 1

Bloomberg

No.1


PHOTON

MunichRe

Insured

DNV GL

2017 TOP Performance

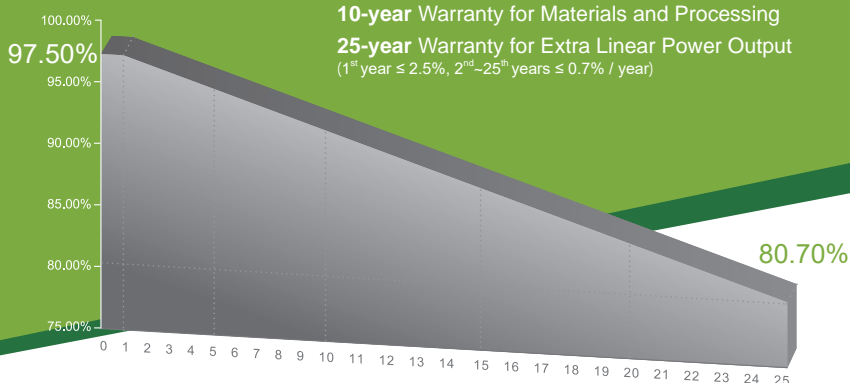

KEY FEATURES



OUTPUT POSITIVE TOLERANCE

Guaranteed 0~+5W positive tolerance ensures power output reliability.



INNOVATIONAL 5-BUSBAR CELLS

Reduces the cell series resistance and internal stress, decreases the risk of micro-crack and improves the module output.



EXCELLENT MECHANICAL LOAD CAPABILITY

Certified to withstand: snow load (6000 Pa) and wind load (3600 Pa).



LOW-LIGHT IRRADIANCE

With the deep textured ARC glass and cell surface texturing process, achieve the excellent performance at the haze, cloudy days and other low light conditions.

COMPREHENSIVE CERTIFICATES



First solar company which passed the TUV Nord IEC/TS 62941 certification audit.



ELECTRICAL SPECIFICATIONS



STC rated output (P_{mpp})*	320 Wp	325 Wp	330 Wp	335 Wp	340 Wp
Rated voltage (V_{mpp}) at STC	37.02 V	37.11 V	37.15 V	37.26 V	37.33 V
Rated current (I_{mpp}) at STC	8.65 A	8.77 A	8.89 A	9.00 A	9.11 A
Open circuit voltage (V_{oc}) at STC	45.45 V	45.67 V	45.86 V	45.98 V	46.16 V
Short circuit current (I_{sc}) at STC	9.25 A	9.48 A	9.52 A	9.57 A	9.62 A
Module efficiency	16.5%	16.8%	17.1%	17.3%	17.6%
Rated output (P_{mpp}) at NOCT	223.5 Wp	226.9 Wp	230.4 Wp	233.9 Wp	237.4 Wp
Rated voltage (V_{mpp}) at NOCT	33.80 V	33.86 V	33.92 V	34.01 V	34.10 V
Rated current (I_{mpp}) at NOCT	6.61 A	6.70 A	6.79 A	6.88 A	6.96 A
Open circuit voltage (V_{oc}) at NOCT	41.70 V	41.91 V	42.08 V	42.19 V	42.36 V
Short circuit current (I_{sc}) at NOCT	7.15 A	7.33 A	7.37 A	7.40 A	7.44 A
Temperature coefficient (P_{mpp})	- 0.408%/°C				
Temperature coefficient (I_{sc})	+0.050%/°C				
Temperature coefficient (V_{oc})	- 0.311%/°C				
Normal operating cell temperature (NOCT)	46±2°C				
Maximum system voltage (IEC)	1000V _{DC} or 1500V _{DC}				
Number of diodes	3				
Junction box IP rating	IP 67				
Maximum series fuse rating	15 A				

* Measurement tolerance +/- 3%

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

NOCT: Irradiance 800W/m², Ambient Temperature 20°C, AM=1.5, Wind Speed 1m/s

CURVE

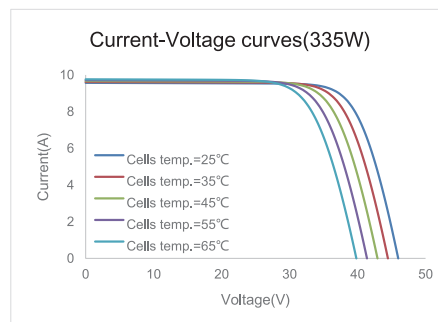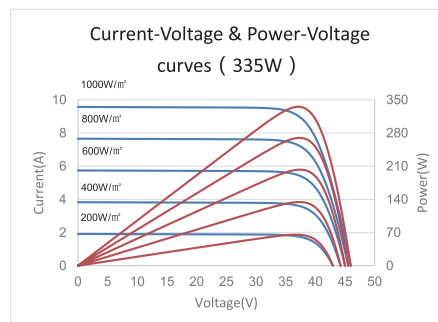

PACKING SPECIFICATIONS

① Weight (module only)	21.8 kg / 48.06 lbs
② Packing unit	27 pcs / box
Weight of packing unit (for 40'HQ container)	646 kg / 1424 lbs
Number of modules per 40'HQ container	648 pcs

① Tolerance +/- 1.0kg

② Subject to sales contract


MECHANICAL SPECIFICATIONS

Outer dimensions (L x W x H)	1954 x 990 x 40 mm 76.93 x 38.98 x 1.57 in
Frame technology	Aluminum, silver anodized
Module composition	Glass / EVA / Backsheet (white)
Front glass thickness	3.2 mm / 0.13 in
① Cable length (IEC)	1150 mm / 45.28 in
Cable diameter (IEC)	4 mm ²
② Maximum mechanical test load	6000 Pa
Fire performance (IEC)	C
Connector type (IEC)	MH5 (by Minghe)

① Option: 900(+)/600(-) mm for defined projects in advance.

② Refer to Astronergy crystalline installation manual or contact technical department.
Maximum Mechanical Test Load=1.5×Maximum Mechanical Design Load.

MODULE DIMENSION DETAILS

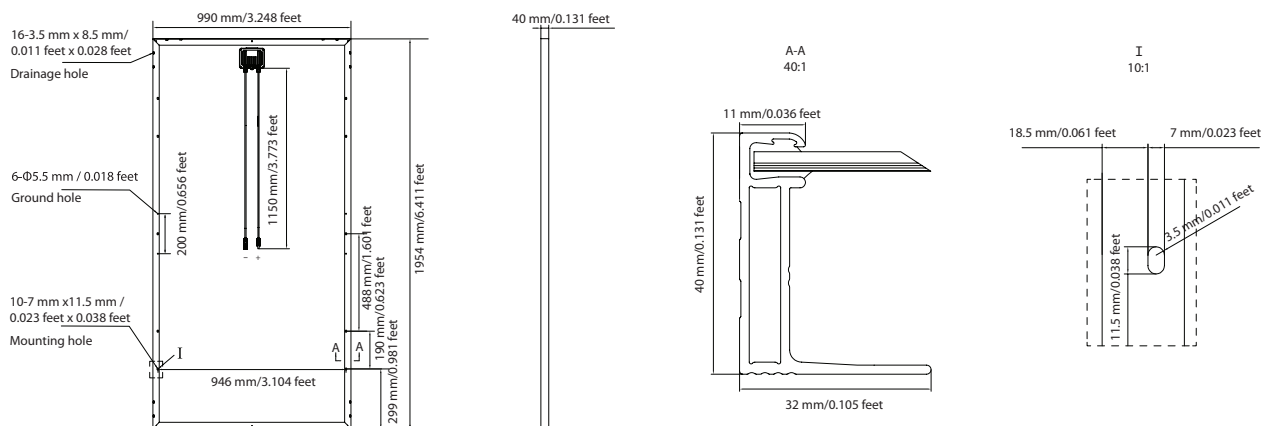

Made in China, Vietnam, Thailand and Germany

© Chint Solar (Zhejiang) Co., Ltd. Reserves the right of final interpretation. please contact our company to use the latest version for contract.

www.astronergy.com

Astronergy 05-2018